



# THOMSIT

make it!



# SUBFLOOR PREPARATION NEXT LEVEL

THE NEW GENERATION OF LEVELLING COMPOUNDS

BUILDING TRUST




# REAL EXPERTS BUILD ON THOMSIT!

The new generation of THOMSIT levelling compounds will help you make your construction projects a success. Thanks to our innovative formulations featuring modern raw materials and a reduced carbon footprint, your flooring projects will be easy to handle and achieve top results.

Our new THOMSIT levelling compounds come packed with a number of innovations that will clearly benefit you on site. That's what we call FLOOR PREPARATION NEXT LEVEL! You can easily identify the advantages of each compound by the corresponding symbols.




Fast drying and rapid work progress thanks to the combination of modern, sustainable binding agents.

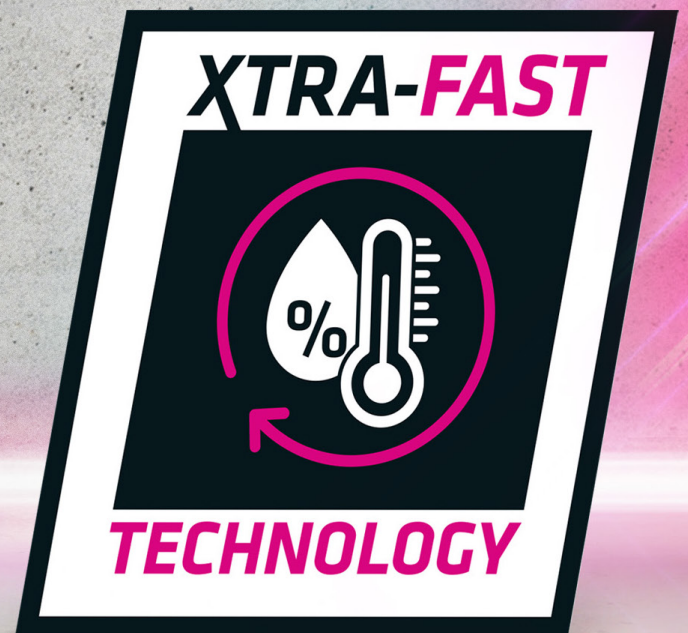

Due to special additives, the levelling compounds harden reliably even in unfavorable climatic conditions such as high humidity or low temperatures.



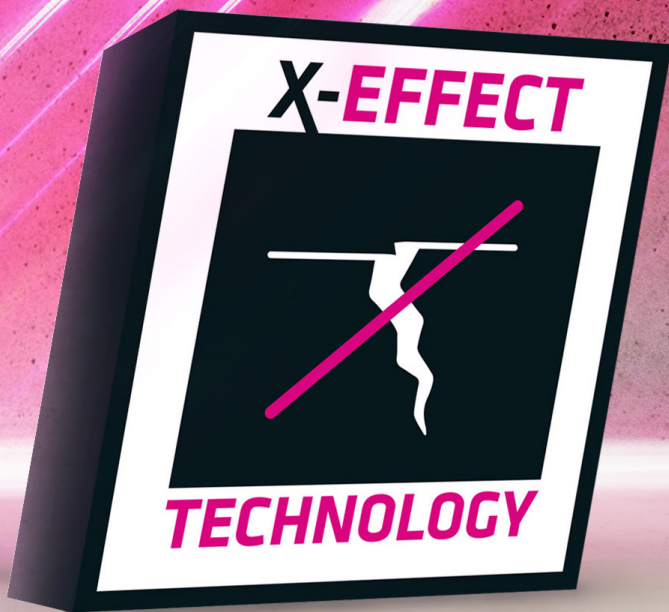

Crack-free levelling results  
thanks to the low-stress  
combination of the individual  
components.

**THE NEW  
EXPERIENCE**



# THE MIX MAKES THE DIFFERENCE!

Whether premium segment or contract sector, whether high-end residential or heavy-duty commercial area – we provide the perfect solution for almost every challenge you need to tackle in floor preparation. Our new levelling compounds fulfill the latest sustainability standards. On top, they are very easy to pump and thus facilitate your work on larger areas.



## PREMIUM FLOORS



### THOMSIT XF 700

**Premium thick-layer leveller for producing layers of 3 to 70 mm**

- With XTRA-FAST Technology: ready to receive flooring after only 24 hrs for layers up to 50 mm
- With XTRA-FAST Technology: rapid readiness for flooring installation even in unfavorable climatic conditions
- With X-EFFECT Technology: for producing crack-free results
- Suitable for use in heavy-duty industrial environments, also under parquet and Sika coatings



### THOMSIT XF 500

**Premium leveller for producing layers of up to 30 mm thickness**

- With XTRA-FAST Technology: ready to receive flooring after only 12 hrs for layers up to 20 mm
- With XTRA-FAST Technology: rapid readiness for flooring installation even in unfavorable climatic conditions
- With X-EFFECT Technology: for producing crack-free results
- Suitable for use in heavy-duty commercial environments, also under parquet and Sika coatings



### THOMSIT XF 300

**Floor leveller for producing layers of up to 15 mm thickness**

- With XTRA-FAST Technology: ready to receive flooring after only 24 hrs for layers up to 10 mm
- With XTRA-FAST Technology: rapid readiness for flooring installation even in unfavorable climatic conditions
- With X-EFFECT Technology for producing crack-free results
- Suitable for use under parquet




## CONTRACT SECTOR



### THOMSIT XE 400

**Thick-layer leveller for producing layers of 3 to 40 mm thickness**

- Particularly suited for thin-layer underfloor heating systems in renovation projects
- With X-EFFECT Technology for producing crack-free results
- Safe and easy application



Scan here to access further information and technical data sheets.

# GO FOR THE MAXIMUM!


Count on THOMSIT to build the basis for successful construction projects. The secret of our success: top products, top advice, top service. For more than eight decades, THOMSIT has convinced the market with innovative products and reliable performance. Are you ready for the new generation of THOMSIT levellers? Find the right product for you in the table opposite.

## TECHNICAL ADVISORY SERVICE:

☎ +49 (0) 0173 - 30 98 602

☎ +49 (0) 0173 - 30 97 662

Scan here to find your  
contact person!





	<b>THOMSIT XF 700</b>	<b>THOMSIT XF 500</b>	<b>THOMSIT XF 300</b>	<b>THOMSIT XE 400*</b>
Pack size	25 kg	25 kg	25 kg	25 kg
Consumption kg/m <sup>2</sup> /mm	1.8	1.6	1.6	1.8
Ready to receive flooring after 6 hrs	up to 5 mm	up to 10 mm	up to 3 mm	
Ready to receive flooring after 12 hrs	up to 20 mm	up to 20 mm	up to 5 mm	
Ready to receive flooring after 24 hrs	up to 50 mm		up to 10 mm	up to 5 mm
Ready to receive flooring after 48 hrs	up to 70 mm		up to 15 mm	up to 10 mm
Ready to receive flooring after 7 days				up to 20 mm
Ready to receive parquet after 6 hrs	up to 5 mm	up to 10 mm		
Ready to receive parquet after 12 hrs	up to 20 mm	up to 20 mm	up to 5 mm	
Ready to receive parquet after 24 hrs	up to 50 mm	up to 30 mm	up to 10 mm	up to 5 mm
Ready to receive parquet after 48 hrs	up to 70 mm		up to 15 mm	
Ready to receive parquet after 7 days				up to 20 mm
Layer thickness range without sand admixed	3 to 50 mm	up to 20 mm	up to 15 mm	3 to 40 mm
Layer thickness range when adding 30 % of THOMSIT QS 20 quartz sand	50 to 70 mm	20 to 30 mm		
Suitable types of parquet	Solid wood and multi-layer parquet	Solid wood and multi-layer parquet	Solid wood and multi-layer parquet	Multi-layer parquet
Suitable for industrial environments	yes	from 3 mm up	no	no
Very low on emissions				

\*Accelerated dry heating is possible in the case of heated floor constructions.

**THOMSIT**

*make it!*

Your expert partner for flooring technology

**PCI Augsburg GmbH**  
Piccardstraße 11  
86159 Augsburg  
Phone: +49 821 5901-0  
thomsit-info@pci-group.eu  
www.thomsit.com

**BUILDING TRUST**

